

# BV66



Max. operating temp. 400°C

Operating pressure 42 bar g

Stainless steel

ASTM A743 (CA 40F)

## Dimensions and weight

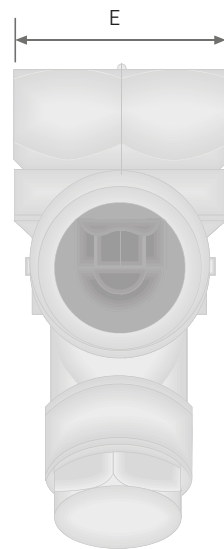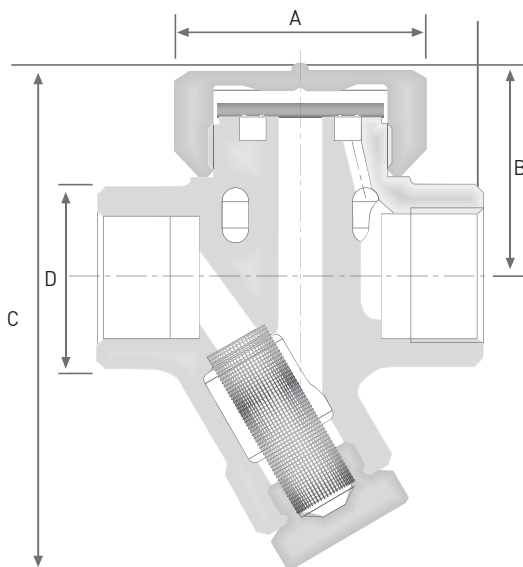

DN	1/2"	3/4"	1"
A	78	90	95
B	41	43	52
C	95	110	124
D	33	39	45
E	41	41	55
Weight (Kg)	0,94	1,10	1,60

Dimensions in mm

## Discharge capacities

Differential Pressure Barg	1/2"	3/4"	1"
0,7	151	339	476
0,8	155	341	484
1	161	352	502
2	203	401	623
3	239	452	701
4	261	502	798
6	342	594	923
8	403	651	1069
10	454	701	1236
15	576	803	1398
20	642	886	1502
25	701	901	1699
30	725	949	1753
42	804	1043	2018

Note: Discharge capacities in Kg/h with outlet pressure 0 bar.

## Discharge capacity [kg/h]

